

Meteo M&R

radiation & light




LP02 pyranometer

SECOND CLASS

SOLAR RADIATION SENSOR

EASY TO USE

LP02 is a solar radiation sensor that can be applied for most common solar radiation observations. It complies with the latest ISO and WMO standards. The scientific name of this instrument is pyranometer.



ingenieursbureau **wittich & visser**

scientific and meteorological instruments

radiation & light

LP02 pyranometer

LP02 is a solar radiation sensor that can be applied for most common solar radiation observations. It complies with the latest ISO and WMO standards. The scientific name of this instrument is pyranometer. LP02 is a modern alternative for the so-called "star" or "black and white" pyranometers overcoming the problem of poor stability of the white reflective paint.

LP02 serves to measure the solar radiation flux that is incident on a plane surface in W/m² from a 180 degrees field of view (also called "global" solar radiation). Working completely passive, using a thermopile sensor, LP02 generates a small output voltage proportional to this flux. Contrary to photodiode-based- and "black and white" instruments LP02 has a spectrally flat response across the full solar spectrum.

Using LP02 is easy. For readout one only needs an accurate voltmeter that works in the millivolt range. To calculate the radiation level the voltage must be divided by the sensitivity; a constant that is supplied with each individual instrument. LP02 can directly be connected to most commonly used datalogging systems.



LP02 can be used for general meteorological observations, building physics and solar collector testing. A common application is for outdoor solar radiation measurements as part of a meteorological station. This application requires horizontal levelling; levelling feet (7) and a level (11) are included. The LP02 cable can easily be installed or replaced by the user.

Applicable standards are ISO 9060 and 9847, WMO (World Meteorological Organisation), and ASTM E824-94. LP02 can also be used for stability estimations according to EPA (EPA-454/R-99-005).




Figure 1
LP02 dimensions. Standard cable length is 5 m. Cable can be installed / replaced by the user.

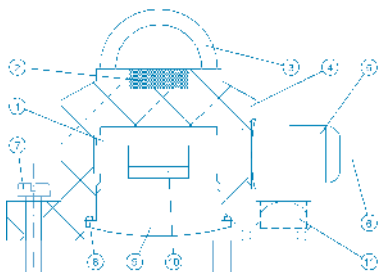



Figure 2
LP02 solar radiation sensor. (1) printed circuit board, (2) sensor, (3) glass dome, (6) cable, standard length 5 m, (10) screwed cable connection, (9) access for cable connection/replacement.

TECHNICAL SPECIFICATIONS

ISO classification	second class
spectral range	305..2800 nm
sensitivity (nominal)	15 μ V/ W.m-2
temperature range	-40°C..+80°C
range	0..2000 W.m-2
temperature dependence	< 0,1%/°C
calibration traceability	WRR

OPTIONS

Additional cable length x metres (add to 5m)
AMF 01 Albedometer Fixture (used with 2 x LP02)
AC100 / AC420 amplifiers
LI 18 hand held readout



ingenieursbureau **wittich & visser**

scientific and meteorological instruments

handelskade 76
2288 bg rijswijk
the netherlands

p.o.box 1111
2280 cc rijswijk
the netherlands

tel. +31 70 3070706
fax +31 70 3070938

www.wittich.nl
info@wittich.nl