

Meteo M&R


radiation & light



HFP01SC heat flux sensor

SELF-CALIBRATING HEAT FLUX SENSOR
FOR THE SCIENTIFIC GRADE MEASUREMENT
OF SOIL HEAT FLUX

The HFP01SC self-calibrating heat flux sensor is a sensor intended for high accuracy measurement of soil heat flux. The on-line calibration automatically corrects for various common errors, in particular those due to the non-perfect matching of the thermal conductivity of sensor and soil, and due to variations of the thermal conductivity of the soil caused by varying moisture content.

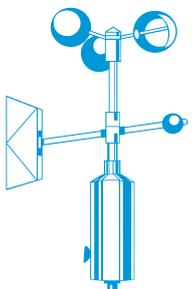

ingenieursbureau **wittich & visser**

scientific and meteorological instruments

radiation & light

HFP01SC self-calibrating heat flux sensor

The HFP01SC self-calibrating heat flux sensor is a sensor intended for high accuracy measurement of soil heat flux. It also offers improved quality assurance of the measurement. The on-line calibration (the Van den Bos-Hoeksema method) automatically corrects for various common errors, in particular those due to the non-perfect matching of the thermal conductivity of sensor and soil, and due to variations of the thermal conductivity of the soil caused by varying moisture content.

HFP01SC is a combination of a heat flux sensor and a film heater. The primary purpose is to estimate the heat flux through the surrounding soil. The HFP01SC output is a voltage signal that is proportional heat flux through the sensor. The film heater that is mounted on top can be activated to perform a calibration (see figure 2), resulting in a new calibration factor that compensates for the errors made under the circumstances of that moment. Implicitly also cable connection, data acquisition and data processing are tested. Also errors due to



temperature dependence and instability of the sensor are eliminated. The result is a much improved accuracy & quality assurance of the measurement (relative to conventional models such as model HFP01).

A typical measurement location is equipped with 2 sensors for good spatial averaging.

The product manual can be obtained via e-mail. A program for the Campbell Scientific CR10X is available.

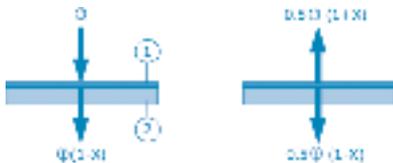


Figure 1

Explanation of the self-calibrating principle: On the left the normal situation with a heat flux ϕ . On the right, the film heater that is mounted on top (1) is activated to generate a well known heat flux ϕ . The response of the heat flux sensor is measured. In the ideal situation 50% of the generated flux ϕ would pass through the plate (typically 150 W/m²). In case of non matching thermal conductivities, a deviation (X) will occur. The essence of this approach is that the flow is divided in an upward flow through undisturbed medium ($1+X$) and a downward flow through the heat flux sensor (a disturbance) plus underlying medium. The $(1-X)$ signal level however, still represents a 0.5ϕ heat flux level of the normal situation of the picture on the left.

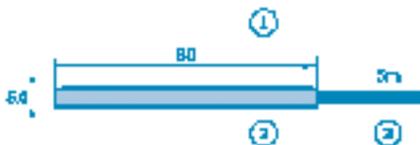


Figure 2

HFP01SC dimensions: heater (1) heat flux sensor body (2), cable (3)

TECHNICAL SPECIFICATIONS


HEAT FLUX SENSOR

Sensitivity (nominal)	50 $\mu\text{V}/\text{Wm}^2$
Resistance (nominal)	2 W
Temperature range	-30 to +70°C
Expected accuracy	$\pm 3\%$

FILM HEATER

Resistance (nominal)	100 W
Voltage input/output	9-15 VDC/ 0-2VD
Duration of calibration	± 3 min at 1.5 Watt typically every 3 or 6 hours
Average power consumption	0.02 to 0.04 Watt

made to measure

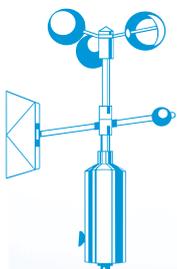

ingenieursbureau **wittich & visser**

scientific and meteorological instruments

handelskade 76
2288 bg rijswijk
the netherlands

p.o.box 1111
2280 cc rijswijk
the netherlands

tel. +31 70 3070706
fax +31 70 3070938

www.wittich.nl
info@wittich.nl